


WARNING

DO NOT EXCEED WORKING LOAD LIMIT.
USE ONLY ALLOY CHAIN WITH COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.

Safe Lifters

Pundol Apartments, Shop No. 5 & 6, 160 M.G. Road,
Pune - 411001, (India) Tel +91 20 66013783 / 84 / 85 / 86
Fax +91 20 26350832 Email : safelifters@eth.net

TRIPLE AND FOUR LEG SLING CHAIN - (GRADE 80)

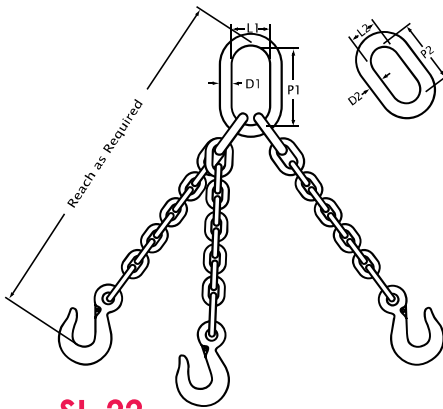


SL-22

Sling Hooks




Master Coupling Link

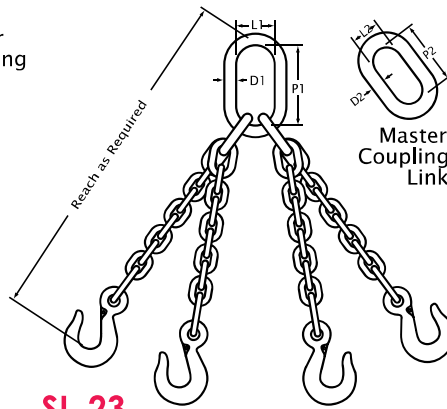

SL-23

Sling Hooks



Master Coupling Link

SAFETY NOTE:

A quad branch chain sling, especially when used on a load of rigid structure, is usually not sustaining the load evenly distributed on each of its four branches.

The maximum Working Load Limits (capacity) are therefore set at the same values as for triple branch chain slings of equal quality and size and used with branches at same angle of inclination.

Triple and Four Sling Chains are also available with Grab Hooks or Foundry Hooks


Available



SIZES AND WORKING LOAD LIMITS* - (GRADE 80)


Chain Trade Size	6 MM	8 MM	10 MM	12 MM	16 MM	18 MM	20 MM	22MM	24 MM	28 MM	32 MM
Working Load Limit (Ton.)* 	2.6	4.2	6.7	10.5	16.8	21.0	26.2	33.5	42.0	53.0	67.0

SINGLE AND DOUBLE BASKET CHAIN SLINGS (GRADE 80)

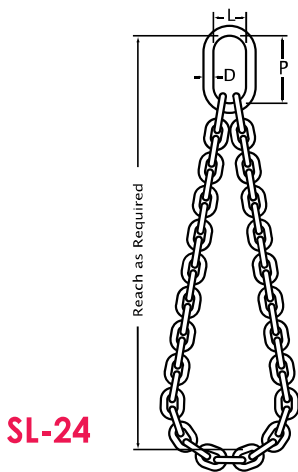

SL-24

SINGLE BASKET

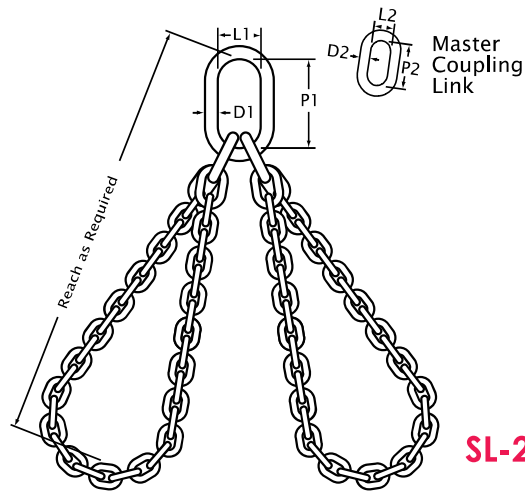

SL-25

DOUBLE BASKET

Available



SIZES AND WORKING LOAD LIMITS* - (GRADE 80)

Chain Trade Size	6 MM	8 MM	10 MM	12 MM	16 MM	18 MM	20 MM	22MM	25 MM	28 MM	32 MM
Working Load Limit (Ton.)* Single Basket Chain Sling 	1.12	2.0	3.2	4.8	8.0	10.0	12.5	16.0	25.0	28.0	32.0
Working Load Limit (Ton.)* Double Basket Chain Sling 	2.24	4.0	6.4	9.60	16.0	20.0	25.0	32.0	50.0	56.0	64.0