

WARNING
DO NOT EXCEED WORKING LOAD LIMIT.
 USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.




Safe Lifters

Pundol Apartments, Shop No. 5 & 6, 160 M.G. Road,
 Pune - 411001, (India) Tel +91 20 66013783 / 84 / 85 / 86
 Fax +91 20 26350832 Email : safelifters@eth.net




G80 Eye Sling Hook



Item No.	Weight/KG	WLL/T	B.L/T	A	E	D	Ø	L
8-SL013-06	0.25	1.2	4.8	9	24	21	20	108
8-SL013-7/8	0.4	2.0	8.0	11	30	26	25	133
8-SL013-10	0.92	3.2	12.8	15	34	39	38	167
8-SL013-13	2.15	5.4	21.6	19	39	54	43	213
8-SL013-16	2.97	8.0	32	23	46	64	50	255
8-SL013-20	6.4	12.5	50	24	57	80	62	304
8-SL013-22	8.2	15	60	32	65	80	62	348
8-SL013-26	13.4	20.0	82.5	35	81	82	64	394
8-SL013-32	18.0	32.0	126	37	102	112	88	480

Specifications given are indicative and are subject to change.


G80 Clevis Chain Hook

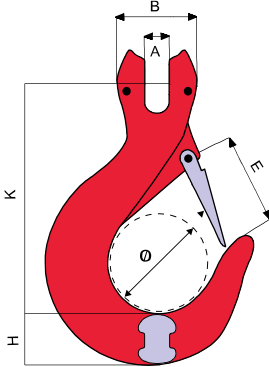

Item No.	Weight/KG	WLL/T	B.L/T	A	B	Ø	H	K	E
8-SL012-06	0.3	1.2	4.8	8	32	35	23	75	26
8-SL012-7/8	0.5	2.0	8.0	9.5	37	37	32.5	85	25
8-SL012-10	0.9	3.2	12.8	13	49	46	35	104	31.5
8-SL012-13	1.7	5.4	21.6	16.5	56.5	56	42	128	35
8-SL012-16	3.5	8.2	32	21.5	70.5	60	53.5	150	49
8-SL012-20	6.19	12.5	50	24	77	79	58	180	59
8-SL012-22	10.0	15	60	27	91	101	62	213	72.5

Specifications given are indicative and are subject to change.


G80 Eye Grab Hook



Item No.	Weight/KG	WLL/T	B.L/T	E	Ø	H	R
8-SL085-06	0.175	1.2	4.8	8	13.5	16	42
8-SL085-7/8	0.307	2	8	10.8	17	24	54
8-SL085-10	0.75	3.2	12.8	13	20	29	79
8-SL085-13	1.4	5.4	21.6	16.5	26	42	99
8-SL085-16	2.3	8.2	32.8	19.2	30	46	106
8-SL085-20	4.6	12.5	50	24	37	55	140
8-SL085-22	8.2	16	64	28	44	69	165
8-SL085-26	9.8	21.2	82.8	30	41	77	187
8-SL085-32	19.4	31.5	126	38	57	95	229.5

Specifications given are indicative and are subject to change.

G80 Eye Foundry Hook



Item No.	Weight/lbs	WLL/lbs	B.L/lbs	E	Ø	L
8-SL015-1/4	2.4	3500	14000	63.5	16	163
8-SL015-3/8	4.5	7100	28400	76	19	200
8-SL015-1/2	7.1	1200	48000	89	25.4	238
8-SL015-5/8	12.2	18100	72400	102	32	278
8-SL015-3/4	19.3	28300	113200	114.5	38	325
8-SL015-7/8	26.3	34200	136800	127.5	40	361

Specifications given are indicative and are subject to change.