


## Rotating Lifting Point ERLP

The new lifting point from Gunnebo Lifting with slim design to fit in confined spaces.

Art. no.	Code	WLL (tonnes)	L	M	B	D	C	H	W	Weight (kgs)
Z101260	ERLP-M8-10	0.3	15	M8	Ø27	10	20	63	52	0.2
Z101261	ERLP-M10-10	0.5	20	M10	Ø27	10	20	63	52	0.2
Z101252	ERLP-M12-10	0.75	19	M12	Ø38	15	31	91.8	73	0.8
Z101253	ERLP-M16-10	1.5	24	M16	Ø38	15	31	91.8	73	0.8

## Rotating Lifting Point RLP

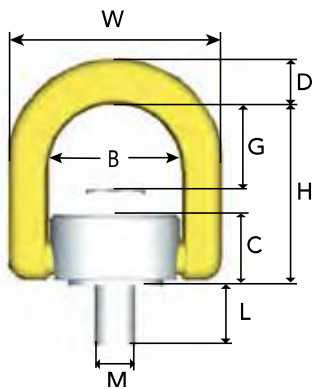


Art. no.	Code	L	M	B	D	G	C	H	W	Weight kgs
Z100095	RLP-M8-10**	15	M8	Ø42	12	35	17.5	60	64	0.3
Z100096	RLP-M10-10**	20	M10	Ø42	12	34	17.5	60	64	0.3
Z100097	RLP-M12-10**	19	M12	Ø57	19	46.5	28	85	91	1.0
Z100098	RLP-M16-10**	24	M16	Ø57	19	44	28	85	91	1.0
Z100092	RLP-M20-10**	32	M20	Ø83	28	56	39.3	111	133	2.8
Z100094	RLP-M24-10**	37	M24	Ø83	28	53	39.3	111	133	3.0
Z100714	RLP-M30-10**	49.5	M30	Ø114	34	69.5	56	144	182	7.0
Z100713	RLP-M36-10	61	M36	Ø114	34	65.5	56	144	182	7.3
Z100707	RLP-M42-10	65.5	M42	Ø149	40.4	90	70	185	229	14.0
Z100708	RLP-M48-10	75.5	M48	Ø149	40.4	86	70	185	229	14.5

Straight pull gives a higher WLL, see table. Longer bolt can be supplied on request.

\*\*Available in UNC thread; 5/16", 3/8", 7/16", 5/8", 3/4".

## Working Load Limits (tonnes) for ERLP & RLP

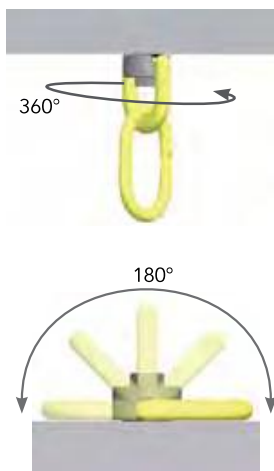

No. of legs	1	1	2	2	2 symmetric		3 & 4 symmetric		3 & 4 symmetric		3 & 4 symmetric	
$\beta$	0°	90°	0°	90°	0-45°	45-60°	0-45°	45-60°	0-45°	45-60°	0-45°	45-60°
Load factor	*)	1	*)	2	1.4	1	2.1	1.5	2.1	1.5	2.1	1.5
RLP-M8-10	0.60	0.30	1.20	0.60	0.42	0.30	0.63	0.45	0.63	0.45	0.63	0.45
RLP-M10-10	1.00	0.50	2.00	1.00	0.70	0.50	1.05	0.75	1.05	0.75	1.05	0.75
RLP-M12-10	1.50	0.75	3.00	1.50	1.00	0.75	1.60	1.13	1.60	1.13	1.60	1.13
RLP-M16-10	3.00	1.50	6.00	3.00	2.10	1.50	3.15	2.25	3.15	2.25	3.15	2.25
RLP-M20-10	5.00	2.50	10.00	5.00	3.50	2.50	5.25	3.75	5.25	3.75	5.25	3.75
RLP-M24-10	7.00	3.50	14.00	7.00	4.90	3.50	7.35	5.25	7.35	5.25	7.35	5.25
RLP-M30-10	12.00	6.00	24.00	12.00	8.40	6.00	12.60	9.00	12.60	9.00	12.60	9.00
RLP-M36-10	14.00	8.00	28.00	16.00	11.20	8.00	16.80	12.00	16.80	12.00	16.80	12.00
RLP-M42-10	16.00	14.00	32.00	28.00	19.60	14.00	29.40	21.00	29.40	21.00	29.40	21.00
RLP-M48-10	20.00	16.00	40.00	32.00	22.40	16.00	33.60	24.00	33.60	24.00	33.60	24.00

\*) Provided only axial loading takes place, i.e. no bending force applied in the direction of the thread

In case of asymmetric loading we recommend following loading:

- 2-leg as corresponding 1-leg.
- 3- or 4-leg as corresponding 2-leg.