



1 Leg



MG1-GBK



MG1-EGKN



TG1-GBK



TG1-EGKN

2 Leg



MG2-GBK



MG2-EGKN



MG2-CL



TG2-GBK



TG2-EGKN

3 Leg



TG3-GBK



TG3-EGKN


4 Leg



TG4-GBK








TG4-EGKN

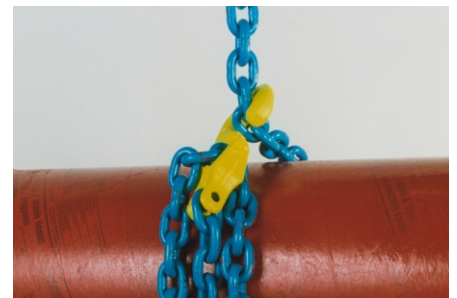

Grablo™ Chain Sling Chart

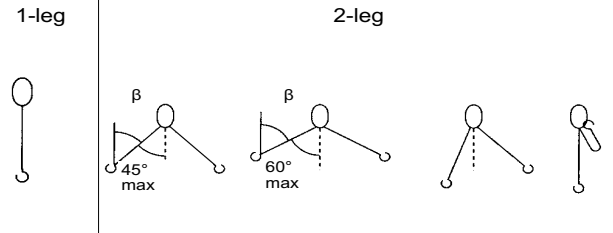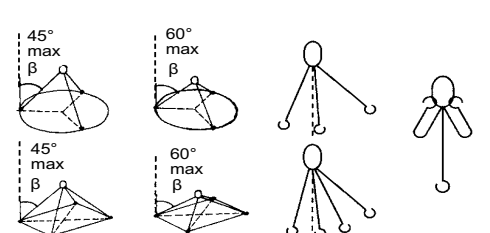

Sling type	1-leg					2-leg				
										
Condition of use	Straight	β 0-45°	β 45-60°	Asymmetrical load	Single point lift	β 0-45°	β 45-60°	Asymmetrical load	Single point lift	
Load factor	1	1.4	1	1	1	2.1	1.5	1	1	
Chain size										
6	1.5	2.12	1.5	1.5	1.5	3.15	2.24	1.5	1.5	
8	2.5	3.5	2.5	2.5	2.5	5.25	3.7	2.5	2.5	
10	4.0	5.6	4.0	4.0	4.0	8.40	6.0	4.0	4.0	
13	6.7	9.5	6.7	6.7	6.7	14.0	10.0	6.7	6.7	
16	10.0	14.0	10.0	10.0	10.0	21.0	15.0	10.0	10.0	
20	16.0	22.4	16.0	16.0	16.0	33.6	24.0	16.0	16.0	

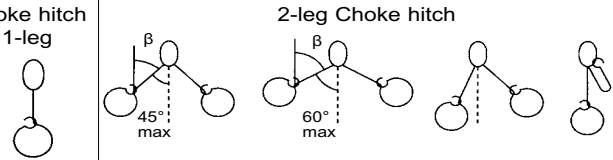Sling type	Choke hitch 1-leg					2-leg Choke hitch				Home pocket loop			
													
Condition of use	Straight	β 0-45°	β 45-60°	Asymmetrical load	Single point lift	α max 30°	β 0-45° α max 30°	β 0-45° α max 30°	β 0-45° α max 30°				
Load factor	0.8	1.1	0.8	0.8	0.8	1	1.4	2.1	2.1				
Chain size													
6	1.2	1.6	1.2	1.2	1.2	1.5	2.12	3.15	3.15				
8	2.0	2.7	2.0	2.0	2.0	2.5	3.5	5.2	5.2				
10	3.2	4.4	3.2	3.2	3.2	4.0	5.6	8.4	8.4				
13	5.2	7.4	5.3	5.3	5.3	6.7	9.5	14.0	14.0				
16	8.0	11.0	8.0	8.0	8.0	10.0	14.0	21.0	21.0				
20	12.8	17.6	12.8	12.8	12.8	-	-	-	-				

Sling type	Basket slings				Endless choke
	Single basket 2-leg top assembly		Double basket 4-leg assembly		
Condition of use	β 0-45°	β 45-60°	β 0-45°	β 45-60°	
Load factor	1.4	1	2.1	1.5	1.6
Chain size					
6	2.12	1.5	3.15	2.24	2.5
8	3.5	2.5	5.2	3.7	4.0
10	5.6	4.0	8.4	6.0	6.4
13	9.5	6.7	14.0	10.0	10.7
16	14.0	10.0	21.0	15.0	16.0
20	22.4	16.0	33.6	24.0	25.6