

**WARNING**

DO NOT EXCEED WORKING LOAD LIMIT.  
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.




# Safe Lifters

Pundol Apartments, Shop No. 5 & 6, 160 M.G. Road,  
Pune - 411001, (India) Tel +91 20 66013783 / 84 / 85 / 86  
Fax +91 20 26350832 Email : safelifters@eth.net

## US Type Anchor Bow Shackle

### Federal Standard RR-C-271D

#### SL - 209

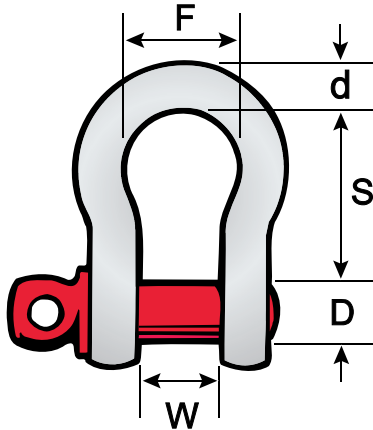


#### ROUND PIN ANCHOR BOW SHACKLE

Round pin anchor shackles meet the requirements of Federal Specification

- Working Load Limit permanently shown on every shackle.
- Forged - Quenched and Tempered, with alloy pins.
- Capacities 1 ton to 150 tons.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are galvanized
- Made from SAE 8620



#### SL - 2130

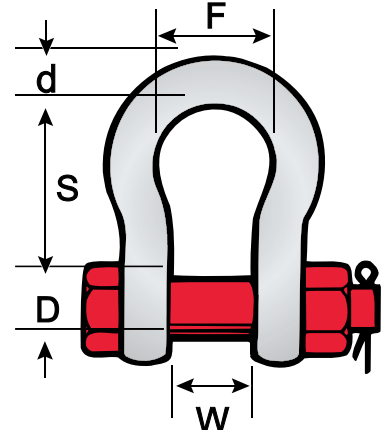

#### NUT BOLT TYPE ANCHOR BOW SHACKLE

Bolt type anchor shackles with thin head bolt-nut with cotter pin. Meets the requirements of Federal Specification

Working Load Limit * Tonnes	BODY DIA d		PIN DIA D		JAW INSIDE WIDTH (W) mm	BOW DIA (F) mm	INSIDE LENGTH (S) mm	EYE OUTSIDE DIA mm	Average weight with Nut Bolt Type Pin Kg.
	mm	in	mm	in					
1	10	3/8	12	1/2	18	26	36	25	0.26
2	12	1/2	16	5/8	20	33	48	32	0.60
3 1/4	16	5/8	19	3/4	27	43	60	38	0.71
4 3/4	19	3/4	22	7/8	32	50	71	44	1.30
6 1/2	22	7/8	25	1	35	51	89	50	1.93
8 1/2	25	1	29	1 1/8	44	60	102	57	2.94
9 1/2	29	1 1/8	32	1 1/4	46	67	114	64	3.88
12	32	1 1/4	35	1 3/8	52	76	127	70	5.58
13 1/2	35	1 3/8	38	1 1/2	57	83	140	77	8.37
17	38	1 1/2	44	1 3/4	60	89	152	90	11.87
20	42	1 5/8	48	1 7/8	67	100	162	96	11.50
25	44	1 3/4	50	2	73	105	178	102	16.00
35	50	2	56	2 1/4	82	121	203	114	25.30
42	56	2 1/4	64	2 1/2	90	137	220	133	32.78
55	64	2 1/2	70	2 3/4	105	152	254	140	41.62
62	70	2 3/4	80	3 1/4	108	168	279	160	58.39
85	76	3	82	3 3/8	125	175	292	164	70.00
100	90	3 1/2	100	4	133	225	365	200	110.00
150	100	4	110	4 1/4	140	250	368	225	157.00

\* Note :Maximum Proof Load is 2 times the Working Load Limit. Minimum Ultimate Load is 5 times the Working Load Limit.  
Specifications given are indicative and are subject to change.