


## TUFF PIPE LOWERING BELT

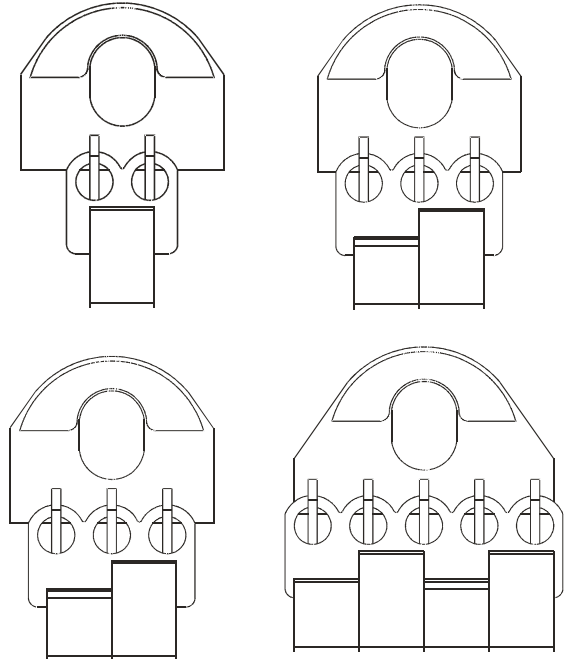

- Manufactured from duplex polyester webbing slings joined together to be used with heavy duty steel terminals
- High load capacity for lowering pipes
- High safety, low elasticity and resistant to ultra-violet rays
- Simple on-site belt replacement in minutes with advanced terminal design
- Economical in use due to long working life

ITEM CODE	NOMINAL PIPE SIZE	HOLES PER	WIDTH MM	LENGTH MTR.	HOOKS PER	S.W.L. FS 5:1 kgs.
TPLB 12	12	2	300	1 45	2	12000
TPLB 18	18	4	450	2 10	4	20000
TPLB 24	24	5	600	2 70	5	25000
TPLB 30	30	6	750	3 35	6	32000
TPLB 36	36	7	900	3 80	7	38000
TPLB 42	42	8	1050	4 21	8	45000

Factor of safety for webbing 1:7 and for steel terminals 1:4



FLAT SLING USED IN CHOKER



ROUND SLING USED IN CHOKER

