





WARNING
 DO NOT EXCEED WORKING LOAD LIMIT.
 USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



TUFF PRO PERMANENT MAGNET LIFTERS

100,300,600,1000KG

- Manually operated ON/OFF switch with safety base
- Widely used for lifting and transporting flat and round steel loads, eliminating the need for slings, clamps or other holding devices
- Low weight and easy to use
- For lifting in industries, harbours, storages and for transportation
- V-slot on base of holding face enables lifting of both cylinders and sheets
- Marked with its own manufacturing number and load tested before delivery
- Test and CE-certificate enclosed




Model	Rated lifting Capacity [kg]	Max Breakaway Force [kg]	Cylindrical Lifting capacity [kg]	L [mm]	B [mm]	H [mm]	R [mm]	Weight [kg]
PML-1	100	350	50	92	62	67	126	3.0
PML-3	300	1050	150	162	92	91	150	10.0
PML-6	600	2100	300	232	122	117	196	24.0
PML-10	1000	3500	500	258	178	163	284	50.0

WLL: 100KG-2000KG

- Top handling - compact dimensions and low dead weight
- Only small sheet thicknesses required
- Safe - 2-hand operation is required to release the magnet
- Guaranteed compliance with a safety factor of 3.5, safety factor: 3:1 is available
- High-quality European devices

Suitable for both flat and round material
 Operating temperature range: -10 to +60 °C

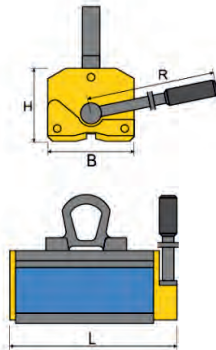

Model	Rated lifting Strength [kg]	Cylindrical lifting capacity [kg]	Max pull-off Strength [kg]	L [mm]	B [mm]	H [mm]	R [mm]	Operation temperature [°C]	N.W. [kg]
PML-1A	100	30	300	134	60	65	130	< 80	3.5
PML-3A	300	100	900	205	87	89	172	< 80	10
PML-6A	600	200	1800	266	112	108	234	< 80	21
PML-10A	1000	300	3000	332	148	125	300	< 80	40
PML-15A	1500	500	4500	385	178	145	330	< 80	65
PML-20A	2000	600	6000	473	178	145	370	< 80	83