


WARNING
 DO NOT EXCEED WORKING LOAD LIMIT.
 USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



Lifting Clutch for Concrete Precast Element



ANCHOR AND CLUTCH MUST BE MATCHED.

Safe Lifters Lifting Clutch are a versatile lifting product for lifting pre-cast concrete products such as construction panels, pipes, columns etc.

- Marked with workload limit, serial number and SLR brand.
- Made from G80 alloy steel with a safety factor of 4 to 1.

| Regularly Check Table- | | |
|------------------------|------------|------------|
| WLL (T) | M max (mm) | N min (mm) |
| 1.3 | 13 | 5.5 |
| 2.5 | 18 | 5.5 |
| 5 | 25 | 8 |
| 10 | 32 | 12 |
| 20 | 46 | 18 |
| 32 | 58 | 24 |


| CODE | WLL | Wt. | DIMENSIONS | | | | | | |
|--------|-------|-------|------------|-------|-------|-----|-------|------|-----|
| | | | C | D | E | F | H | M | L |
| | tonne | kg | mm | mm | mm | mm | mm | mm | mm |
| 141001 | 1.3 | 0.89 | 80.4 | 70.5 | 45 | 73 | 157 | 11.5 | 181 |
| 141002 | 2.5 | 1.3 | 99 | 85 | 57 | 88 | 190 | 16 | 220 |
| 141005 | 5 | 3.24 | 133 | 88 | 69 | 110 | 233 | 22 | 271 |
| 141010 | 10 | 10 | 176 | 116 | 83 | 161 | 336.5 | 30 | 386 |
| 141020 | 20 | 20.37 | 228 | 133.5 | 107.5 | 182 | 437 | 42 | 497 |
| 141030 | 32 | 47 | 325 | 188 | 160 | 272 | 555 | 52 | 760 |

*Panel Lifters should be checked regularly follow the Regularly Check Table.

Ring Clutch for Concrete Precast Element

Safe Lifters Ring Clutch is a lifting device which is used together with Cast Plate Anchors. Ring Clutches are used for lifting large precast concrete panels. The Ring Head of the clutch has a locking bolt, which helps to safely lock into plate anchors while the concrete panels is in lifting process. Safe Lifters Ring Clutches are available in a variety of lifting capacities to suite to your work.

- Capacities available from 2.5 tonne to 10 tonne.
- All clutches are proof loaded, Test Certificate supplied.
- Ring Clutches have a safety factor of 5 to 1.

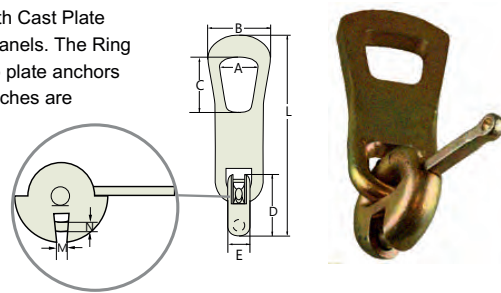

ANCHOR AND CLUTCH MUST BE MATCHED.

| CODE | WLL | DIMENSIONS | | | | | |
|-------------|---------|------------|-----|-----|-----|----|-----|
| | | A | B | C | D | E | L |
| | tonne | mm | mm | mm | mm | mm | mm |
| SLR547-2.5 | 0.7-2.5 | 58 | 95 | 70 | 74 | 35 | 264 |
| SLR547-5.0 | 3.0-5.0 | 66 | 117 | 85 | 98 | 45 | 333 |
| SLR547-10.5 | 3-10.0 | 85 | 148 | 110 | 139 | 56 | 424 |

| Regularly Check Table- | | |
|------------------------|------------|------------|
| WLL (T) | M max (mm) | N min (mm) |
| 0.7-2.5 | 13 | 12 |
| 3.0-5.0 | 19.5 | 15.5 |
| 5.3-10.0 | 23.5 | 22.5 |

*Panel Lifters should be checked regularly follow the Regularly Check Table.

WARNING
 DO NOT EXCEED WORKING LOAD LIMIT.
 USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.




Spread Anchor

| 0.7-2.5T | WLL | DIMENSIONS | | | |
|----------|-------|------------|------|------|------|
| CODE | tonne | a mm | b mm | c mm | L mm |
| 730711 | 0.7 | 30 | 14 | 5 | 110 |
| 731411 | 1.4 | 30 | 14 | 6 | 110 |
| 731416 | 1.4 | 30 | 14 | 6 | 160 |
| 732013 | 2.0 | 30 | 14 | 8 | 130 |
| 732016 | 2.0 | 30 | 14 | 8 | 160 |
| 732021 | 2.0 | 30 | 14 | 8 | 210 |
| 732515 | 2.5 | 30 | 14 | 10 | 150 |
| 732520 | 2.5 | 30 | 14 | 10 | 200 |
| 732525 | 2.5 | 30 | 14 | 10 | 250 |


Safe Lifters Anchors are produced from high strength low alloy steel plates. Safe Lifters Anchors have high tensile strength and good elongation. Due to special material. Anchors has high impact test value and can be used under low temperature circumstances (up to - 20)
 Upper hole of Spread Anchor is used for connection with Safe Lifters Ring Clutch. Bottom hole is used for reinforcement.
 Due to reinforcement, force is transmitted to precast concrete element.
 Safe Lifters Two Holes Anchor can be used for lifting of precast concrete girders, plates other elements.

| 3-5T | WLL | DIMENSIONS | | | |
|--------|-------|------------|------|------|------|
| CODE | tonne | a mm | b mm | c mm | L mm |
| 733016 | 3.0 | 40 | 18 | 10 | 160 |
| 733020 | 3.0 | 40 | 18 | 10 | 200 |
| 733028 | 3.0 | 40 | 18 | 10 | 280 |
| 734018 | 4.0 | 40 | 18 | 12 | 180 |
| 734024 | 4.0 | 40 | 18 | 12 | 240 |
| 734032 | 4.0 | 40 | 18 | 12 | 320 |
| 735018 | 5.0 | 40 | 18 | 15 | 180 |
| 735024 | 5.0 | 40 | 18 | 15 | 240 |
| 735040 | 5.0 | 40 | 18 | 15 | 400 |

| 5.3-10T | WLL | DIMENSIONS | | | |
|---------|-------|------------|------|------|------|
| CODE | tonne | a mm | b mm | c mm | L mm |
| 735322 | 5.3 | 60 | 26 | 12 | 220 |
| 735326 | 5.3 | 60 | 26 | 12 | 260 |
| 735334 | 5.3 | 60 | 26 | 12 | 340 |
| 737526 | 7.5 | 60 | 26 | 16 | 260 |
| 737530 | 7.5 | 60 | 26 | 16 | 300 |
| 737542 | 7.5 | 60 | 26 | 16 | 420 |
| 739030 | 10 | 60 | 26 | 20 | 300 |
| 739037 | 10 | 60 | 26 | 20 | 370 |
| 739052 | 10 | 60 | 26 | 20 | 520 |

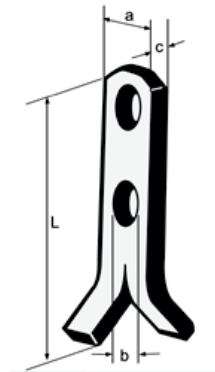

Recess Former Kit

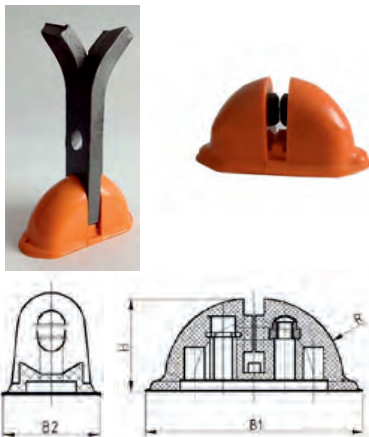

Safe Lifters Recess Former kit are special lifting accessories which used together with Safe Lifters Spread Anchor and Safe Lifters Ring Clutch. They are needed to create a hole in the concrete element, when lifting stud is mounted to the concrete. After concrete is stable, Recess Former is taken out and Ring clutch is used to lift the precast concrete element. Safe Lifters Recess Former Round is made from rubber. Each size has a different colour, which makes identification of load class easier.

| CODE | WLL. | DIMENSIONS | | | | Wt kg/pc |
|--------|------|------------|-------|------|------|----------|
| | | B1 mm | B2 mm | R mm | H mm | |
| 141132 | 2.5 | 106 | 43 | 40 | 45 | 0.13 |
| 141135 | 5 | 134 | 55 | 56 | 59 | 0.24 |
| 141137 | 10 | 188 | 78 | 80 | 81 | 0.66 |

WARNING
DO NOT EXCEED WORKING LOAD LIMIT.
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



Head Lifting Anchor Bolts



ANCHOR BOLT AND CLUTCH MUST BE MATCHED.

| Product Code | WLL | Dimensions (mm) | | | | | Quantity per Box |
|--------------|------|-----------------|----|----|-----|-----|------------------|
| | t | L | H | S | F | | |
| 09106061 | 1.3 | 35 | 19 | 10 | 25 | 200 | |
| 09106062 | 1.3 | 45 | 19 | 10 | 25 | 200 | |
| 09106063 | 1.3 | 55 | 19 | 10 | 25 | 200 | |
| 09106064 | 1.3 | 65 | 19 | 10 | 25 | 200 | |
| 09106066 | 1.3 | 85 | 19 | 10 | 25 | 100 | |
| 09106068 | 1.3 | 120 | 19 | 10 | 25 | 100 | |
| 09106071 | 1.3 | 240 | 19 | 10 | 25 | 50 | |
| 09106082 | 2.5 | 55 | 26 | 14 | 35 | 100 | |
| 09106084 | 2.5 | 75 | 26 | 14 | 35 | 100 | |
| 09106085 | 2.5 | 85 | 26 | 14 | 35 | 50 | |
| 09106087 | 2.5 | 120 | 26 | 14 | 35 | 50 | |
| 09106089 | 2.5 | 170 | 26 | 14 | 35 | 25 | |
| 09106091 | 2.5 | 280 | 26 | 14 | 35 | 25 | |
| 09106095 | 5.0 | 75 | 36 | 20 | 50 | 50 | |
| 09106097 | 5.0 | 95 | 36 | 20 | 50 | 50 | |
| 09106099 | 5.0 | 120 | 36 | 20 | 50 | 25 | |
| 09106100 | 5.0 | 150 | 36 | 20 | 50 | 25 | |
| 09106101 | 5.0 | 170 | 36 | 20 | 50 | 25 | |
| 09106102 | 5.0 | 240 | 36 | 20 | 50 | 20 | |
| 09106104 | 5.0 | 340 | 36 | 20 | 50 | 10 | |
| 09106107 | 5.0 | 960 | 36 | 20 | 50 | 1 | |
| 09106113 | 10.0 | 150 | 47 | 28 | 70 | 10 | |
| 09106118 | 10.0 | 340 | 47 | 28 | 70 | 5 | |
| 09106121 | 20.0 | 340 | 70 | 39 | 98 | 1 | |
| 09106122 | 20.0 | 500 | 70 | 39 | 98 | 1 | |
| 09106126 | 32.0 | 700 | 88 | 50 | 135 | 1 | |
| 09106127 | 32.0 | 1,200 | 88 | 50 | 135 | 1 | |

