

**WARNING**

DO NOT EXCEED WORKING LOAD LIMIT.  
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



# Safe Lifters

ESTD.1986

DEALERS IN LIFTING EQUIPMENTS

Pundol Apartments, Shop No. 5 & 6, 160 M.G. Road, Pune - 411001. (India)


Tel. : +91 - 20 - 6708 8100

Fax : +91 - 20 - 6708 8101

Email : sales@safelifters.com

Website : www.safelifters.com

## Eye Bolts

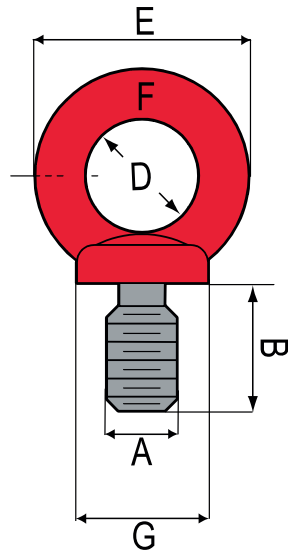

**SL-51**

### SafePoint Forged Eye Bolt

| Dimen.<br>A | WLL@<br>0° t | WLL@<br>90° t | B<br>mm | D<br>mm | E<br>mm | F<br>mm | G<br>mm | Weight<br>kg /<br>100 pcs |
|-------------|--------------|---------------|---------|---------|---------|---------|---------|---------------------------|
| M 6         | 0.40         | 0.15          | 13      | 16      | 28      | 7       | 17      | 3                         |
| M 8         | 1.00         | 0.40          | 15      | 20      | 36      | 8       | 20      | 6                         |
| M10         | 1.00         | 0.40          | 18      | 25      | 45      | 10      | 25      | 10                        |
| M12         | 2.00         | 0.75          | 22      | 30      | 54      | 12      | 30      | 18                        |
| M16         | 4.00         | 1.50          | 28      | 35      | 63      | 14      | 35      | 28                        |
| M20         | 6.00         | 2.30          | 30      | 40      | 72      | 16      | 40      | 43                        |
| M24         | 8.00         | 3.20          | 38      | 50      | 90      | 20      | 50      | 84                        |
| M30         | 12.0         | 4.50          | 45      | 60      | 108     | 24      | 65      | 166                       |
| M36         | 16.0         | 7.00          | 55      | 70      | 126     | 28      | 75      | 265                       |
| M42         | 24.0         | 9.00          | 65      | 80      | 144     | 32      | 85      | 403                       |
| M48         | 32.0         | 12.0          | 70      | 90      | 166     | 38      | 100     | 632                       |


Specifications given are indicative and are subject to change.

All dimensions in mm

Proof Load = 2 x S.W.L. (Safe Working Load)

**IS : 4190 / 1967**

### High Tensile Forged Eye Bolts With Collar

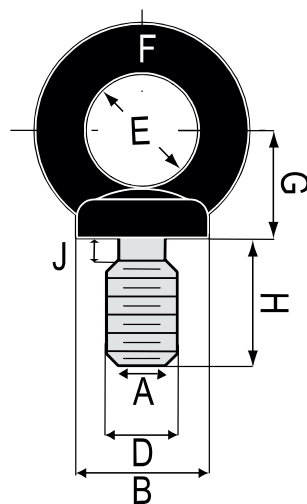

**SL-52**

| Thread<br>Size D | S.W.L. @<br>0° (kg.) | A<br>mm | B<br>mm | E<br>mm | F<br>mm | G<br>mm | H<br>mm | J<br>mm | Coarse<br>Pitch |
|------------------|----------------------|---------|---------|---------|---------|---------|---------|---------|-----------------|
| M8               | 160                  | 6       | 20      | 20      | 6.3     | 20      | 15      | 1       | 1.25            |
| M10              | 250                  | 7.7     | 24      | 24      | 8       | 25      | 17      | 1       | 1.5             |
| M12              | 400                  | 9.4     | 28      | 28      | 9.5     | 30      | 20      | 1       | 1.75            |
| M16              | 630                  | 13      | 34      | 34      | 12.5    | 36      | 24      | 1       | 2.0             |
| M20              | 1000                 | 16.4    | 40      | 40      | 16      | 45      | 27      | 1       | 2.5             |
| M24              | 1600                 | 19.6    | 48      | 48      | 19      | 53      | 31      | 2       | 3.0             |
| M30              | 2500                 | 25      | 56      | 56      | 24      | 64      | 39      | 2       | 3.5             |
| M36              | 4000                 | 30.3    | 67      | 67      | 28      | 75      | 48      | 3       | 4.0             |
| M42              | 6300                 | 35.6    | 80      | 80      | 34      | 90      | 56      | 3       | 4.5             |
| M48              | 8000                 | 41      | 95      | 95      | 38      | 100     | 65      | 3       | 5.0             |
| M56              | 10000                | 48.3    | 112     | 112     | 45      | 119     | 73      | 4       | 5.5             |
| M64              | 16000                | 55.7    | 125     | 125     | 50      | 135     | 85      | 4       | 6.0             |
| M72              | 20000                | 63.7    | 140     | 140     | 58      | 153     | 95      | 4       | 6.0             |
| M80              | 25000                | 71.7    | 160     | 160     | 63      | 165     | 110     | 4       | 6.0             |
| M90              | 32000                | 81.7    | 180     | 180     | 71      | 180     | 125     | 5       | 6.0             |
| M100             | 40000                | 91.7    | 200     | 200     | 80      | 195     | 140     | 5       | 6.0             |

Specifications given are indicative and are subject to change.

All dimensions in mm

Proof Load = 2 x S.W.L. (Safe Working Load)

Other threads can also be supplied to special order.

**⚠ WARNING**

DO NOT EXCEED WORKING LOAD LIMIT.  
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



# Safe Lifters

ESTD.1986

DEALERS IN LIFTING EQUIPMENTS

Pundol Apartments, Shop No. 5 & 6, 160 M.G. Road, Pune - 411001. (India)

Tel. : +91 - 20 - 6708 8100


Fax : +91 - 20 - 6708 8101

Email : sales@safelifters.com

Website : www.safelifters.com

## Eye Bolts

**DIN 580**

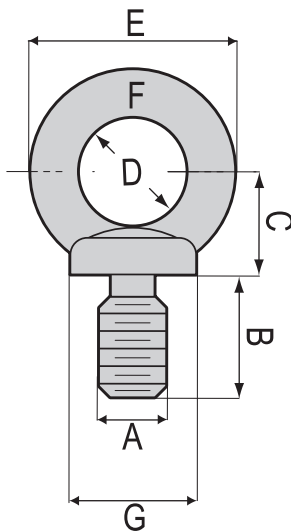

**SL-54**

### C15 Steel Forged Eye Bolts With Collar

| Dimen.<br>A | WLL<br>t | B<br>mm | C<br>mm | D<br>mm | E<br>mm | F<br>mm | G<br>mm | Weight<br>kg /<br>100 pcs |
|-------------|----------|---------|---------|---------|---------|---------|---------|---------------------------|
| M 6         | 0,07     | 13      | 17      | 16      | 28      | 7       | 17      | 3                         |
| M 8         | 0,14     | 13      | 18      | 20      | 36      | 8       | 20      | 6                         |
| M10         | 0,23     | 17      | 23      | 25      | 45      | 10      | 25      | 10                        |
| M12         | 0,34     | 20      | 27      | 30      | 53      | 12      | 30      | 18                        |
| M14         | 0,49     | 27      | 31      | 35      | 60      | 13      | 35      | 27                        |
| M16         | 0,70     | 27      | 31      | 35      | 62      | 14      | 35      | 28                        |
| M20         | 1,20     | 30      | 35      | 40      | 71      | 16      | 40      | 43                        |
| M24         | 1,80     | 36      | 45      | 50      | 90      | 20      | 50      | 84                        |
| M30         | 3,60     | 45      | 55      | 60      | 109     | 24      | 65      | 166                       |
| M36         | 5,10     | 54      | 65      | 70      | 128     | 28      | 75      | 265                       |
| M42         | 7,00     | 63      | 74      | 80      | 147     | 32      | 85      | 403                       |
| M48         | 8,60     | 68      | 85      | 90      | 168     | 38      | 100     | 632                       |
| M56         | 11,50    | 78      | 94      | 100     | 187     | 42      | 110     | 880                       |
| M64         | 16,00    | 90      | 105     | 110     | 208     | 48      | 120     | 1240                      |


Specifications given are indicative and are subject to change.

All dimensions in mm

Proof Load = 2 x S.W.L. (Safe Working Load)

## Eye Nut

**DIN 582**

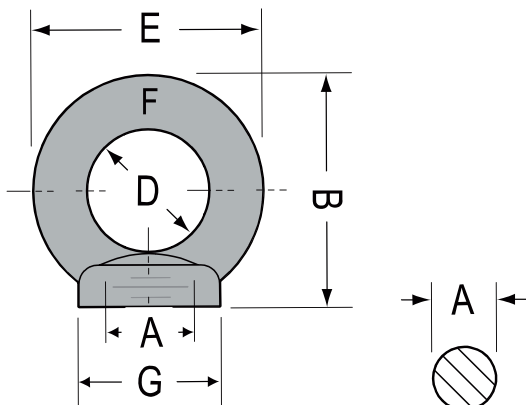

**SL-55**

### C15 Steel Forged Eye Nut With Collar

| Dimen.<br>A | WLL<br>t | B<br>mm | D<br>mm | E<br>mm | F<br>mm | G<br>mm | Weight<br>kg /<br>100 pcs |
|-------------|----------|---------|---------|---------|---------|---------|---------------------------|
| M 6         | 0,07     | 34      | 20      | 36      | 7       | 20      | 4                         |
| M 8         | 0,14     | 36      | 20      | 36      | 8       | 20      | 5                         |
| M10         | 0,23     | 45      | 25      | 45      | 10      | 25      | 9                         |
| M12         | 0,34     | 54      | 30      | 53      | 12      | 30      | 16                        |
| M14         | 0,49     | 63      | 35      | 60      | 13      | 35      | 23                        |
| M16         | 0,70     | 63      | 35      | 62      | 14      | 35      | 24                        |
| M20         | 1,20     | 72      | 40      | 71      | 16      | 40      | 35                        |
| M24         | 1,80     | 90      | 50      | 90      | 20      | 50      | 70                        |
| M30         | 3,60     | 109     | 60      | 109     | 24      | 65      | 132                       |
| M36         | 5,10     | 128     | 70      | 128     | 28      | 75      | 208                       |
| M42         | 7,00     | 147     | 80      | 147     | 32      | 85      | 311                       |
| M48         | 8,60     | 168     | 90      | 168     | 38      | 100     | 502                       |
| M56         | 11,50    | 187     | 100     | 187     | 42      | 110     | 669                       |
| M64         | 16,00    | 208     | 110     | 208     | 48      | 120     | 930                       |

Specifications given are indicative and are subject to change.

All dimensions in mm

Proof Load = 2 x S.W.L. (Safe Working Load)







**WARNING**

DO NOT EXCEED WORKING LOAD LIMIT.

USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



## SLRP- 301 ROTATING EYE BOLT

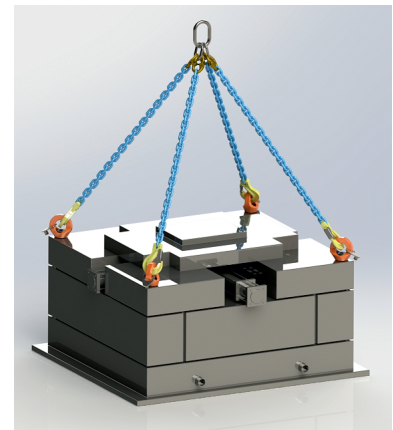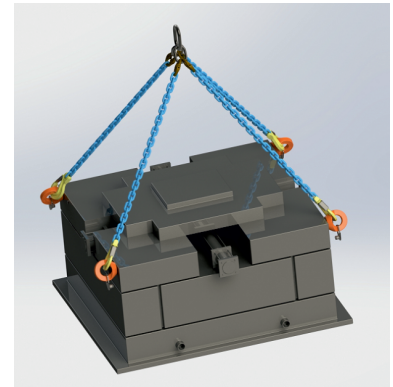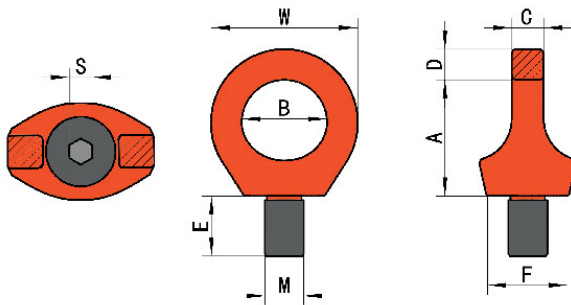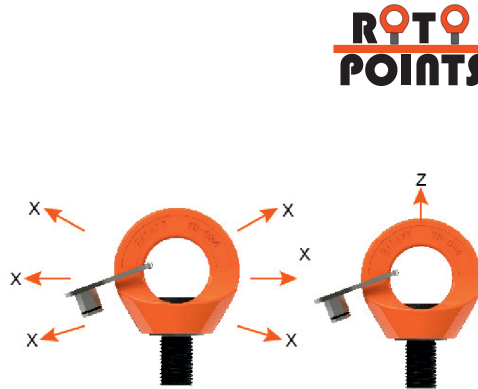





| WLL/T |       | M  | mm  |    |     |    |    |     |    |     | KG   |
|-------|-------|----|-----|----|-----|----|----|-----|----|-----|------|
| X     | ( Z ) |    | A   | B  | C   | D  | E  | F   | S  | W   |      |
| 0.3   | (1)   | 8  | 34  | 25 | 8.5 | 11 | 12 | 28  | 6  | 47  | 0.14 |
| 0.4   | (1)   | 10 | 34  | 25 | 8.5 | 11 | 15 | 28  | 6  | 47  | 0.14 |
| 0.75  | (2)   | 12 | 42  | 30 | 10  | 13 | 18 | 34  | 8  | 56  | 0.25 |
| 0.75  | (2)   | 14 | 42  | 30 | 10  | 13 | 18 | 34  | 8  | 56  | 0.3  |
| 1.5   | (4)   | 16 | 49  | 35 | 14  | 15 | 24 | 40  | 10 | 65  | 0.45 |
| 1.5   | (4)   | 18 | 49  | 35 | 14  | 15 | 24 | 40  | 10 | 65  | 0.5  |
| 2.3   | (6)   | 20 | 57  | 40 | 16  | 17 | 30 | 50  | 12 | 75  | 0.7  |
| 2.3   | (6)   | 22 | 57  | 40 | 16  | 17 | 30 | 50  | 12 | 75  | 0.8  |
| 3.2   | (8)   | 24 | 70  | 48 | 19  | 21 | 36 | 62  | 14 | 90  | 1.14 |
| 3.2   | (8)   | 27 | 70  | 48 | 19  | 21 | 36 | 62  | 14 | 90  | 1.2  |
| 4.5   | (12)  | 30 | 86  | 60 | 24  | 26 | 45 | 75  | 17 | 112 | 2.2  |
| 4.5   | (12)  | 33 | 86  | 60 | 24  | 26 | 45 | 75  | 17 | 112 | 2.4  |
| 7     | (16)  | 36 | 103 | 72 | 29  | 32 | 54 | 90  | 22 | 135 | 4    |
| 9     | (24)  | 42 | 120 | 82 | 34  | 38 | 63 | 105 | 24 | 158 | 6.43 |
| 12    | (32)  | 48 | 137 | 94 | 38  | 43 | 72 | 120 | 27 | 180 | 9.8  |

## WARNING

DO NOT EXCEED WORKING LOAD LIMIT.  
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



## SLRP- 303 SWIVEL EYE BOLT

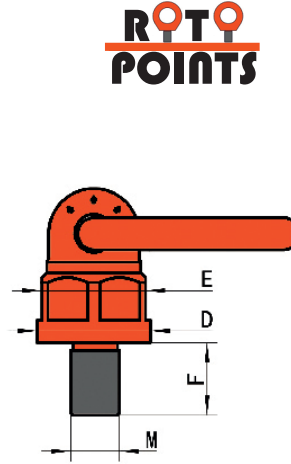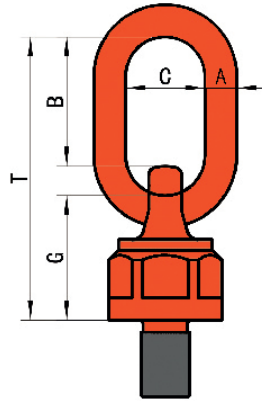

| SIZE              | T    |        |       | mm |     |    |     |     |      |      |         |     | Kg   |
|-------------------|------|--------|-------|----|-----|----|-----|-----|------|------|---------|-----|------|
|                   | X    | (Y)    | [Z]   | A  | B   | C  | D   | E   | F    | G    | M       | T   |      |
| M8 × 1.25-6g      | 0.3  | (0.4)  | [0.6] | 13 | 42  | 30 | 40  | 37  | 12   | 44   | 8       | 96  | 0.42 |
| M10 × 1.5-6g      | 0.45 | (0.6)  | [0.9] | 13 | 42  | 30 | 40  | 37  | 19   | 44   | 10      | 96  | 0.45 |
| M12 × 1.75-6g     | 0.6  | (0.7)  | [1.2] | 13 | 42  | 30 | 40  | 37  | 19   | 44   | 12      | 96  | 0.45 |
| M14 × 2.0-6g      | 1    | (1.25) | [2]   | 13 | 42  | 30 | 40  | 37  | 31.8 | 44   | 14      | 96  | 0.46 |
| M16 × 2.0-6g      | 1.3  | (1.5)  | [2.6] | 13 | 42  | 30 | 40  | 37  | 31.8 | 44   | 16      | 96  | 0.5  |
| M18 × 2.5-6g      | 1.8  | (2)    | [3.6] | 20 | 67  | 40 | 70  | 65  | 38.1 | 75.5 | 18      | 160 | 2.2  |
| M20 × 2.5-6g      | 2    | (2.5)  | [4]   | 20 | 67  | 40 | 70  | 65  | 38.1 | 75.5 | 20      | 160 | 2.3  |
| M22 × 2.5-6g      | 2    | (2.5)  | [4]   | 20 | 67  | 40 | 70  | 65  | 38.1 | 75.5 | 22      | 160 | 2.3  |
| M24 × 3.0-6g      | 3.5  | (4)    | [7]   | 20 | 67  | 40 | 70  | 65  | 38.1 | 75.5 | 24      | 160 | 2.4  |
| M30 × 3.5-6g      | 6    | (7.5)  | [10]  | 22 | 95  | 51 | 79  | 74  | 50   | 90   | 30      | 205 | 3.8  |
| M33 × 3.5-6g      | 6    | (7.5)  | [10]  | 22 | 95  | 51 | 79  | 74  | 50   | 90   | 33      | 205 | 3.8  |
| M36 × 4.0-6g      | 8    | (10)   | [15]  | 22 | 95  | 51 | 79  | 74  | 54   | 90   | 36      | 205 | 3.9  |
| M39 × 4.0-6g      | 8    | (10)   | [15]  | 22 | 95  | 51 | 79  | 74  | 58   | 90   | 39      | 205 | 4    |
| M42 × 4.5-6g      | 12   | (13)   | [17]  | 26 | 108 | 63 | 93  | 85  | 63   | 100  | 42      | 230 | 6    |
| M45 × 4.5-6g      | 12   | (13)   | [17]  | 26 | 108 | 63 | 93  | 85  | 68   | 100  | 45      | 230 | 6    |
| M48 × 5.0-6g      | 13   | (16)   | [18]  | 26 | 108 | 63 | 93  | 85  | 68   | 100  | 48      | 230 | 6    |
| M52 × 5.0-6g      | 14   | (20)   | [25]  | 32 | 120 | 70 | 105 | 95  | 84   | 132  | 52      | 278 | 10.8 |
| M56 × 5.5-6g      | 16   | (22)   | [28]  | 32 | 120 | 70 | 105 | 95  | 84   | 132  | 56      | 278 | 10.8 |
| M60 × 5.5-6g      | 16   | (22)   | [28]  | 32 | 120 | 70 | 105 | 95  | 90   | 132  | 60      | 278 | 10.8 |
| M64 × 6.0-6g      | 16   | (25)   | [28]  | 32 | 120 | 70 | 105 | 95  | 95   | 132  | 64      | 278 | 10.8 |
| M72 × 6.0-6g      | 31.5 | (40)   | [50]  | 46 | 130 | 90 | 170 | 145 | 108  | 160  | 72      | 340 | 31   |
| M80 × 6.0-6g      | 35   | (48)   | [50]  | 46 | 130 | 90 | 170 | 145 | 120  | 160  | 80      | 340 | 32   |
| M90 × 6.0-6g      | 40   | (50)   | [50]  | 46 | 130 | 90 | 170 | 145 | 135  | 160  | 90      | 340 | 34   |
| M100~150 × 6.0-6g | 40   | (50)   | [50]  | 46 | 130 | 90 | 170 | 145 | 135  | 160  | 100~150 | 340 | 36.5 |





## WARNING



DO NOT EXCEED WORKING LOAD LIMIT.  
USE ONLY G80 & G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



## SLRP- 303 SWIVEL EYE BOLT

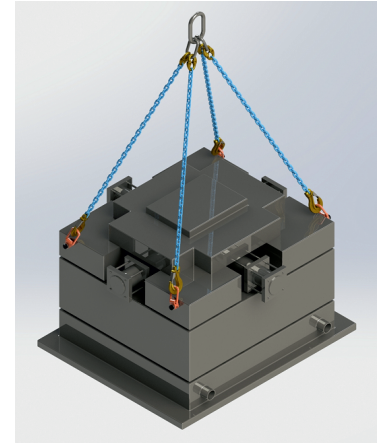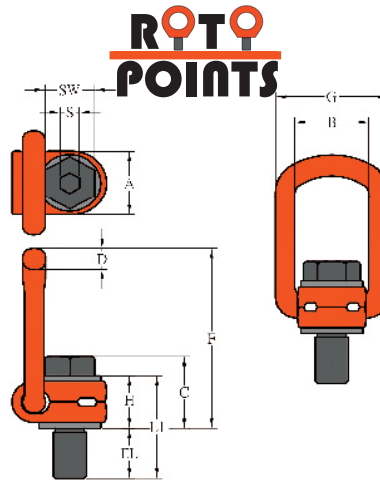

| SIZE          | WLL/T | M   | mm |     |     |    |    |     |     |    |    |    | Nm   | Kg   |
|---------------|-------|-----|----|-----|-----|----|----|-----|-----|----|----|----|------|------|
|               |       |     | A  | B   | C   | D  | E  | F   | G   | H  | S  | SW |      |      |
| M8 × 1.25-6g  | 0.3   | M8  | 33 | 37  | 35  | 14 | 11 | 98  | 57  | 36 | 6  | 13 | 30   | 0.5  |
| M10 × 1.5-6g  | 0.63  | M10 | 33 | 37  | 36  | 14 | 16 | 98  | 57  | 36 | 6  | 17 | 60   | 0.5  |
| M12 × 1.75-6g | 1     | M12 | 33 | 37  | 44  | 14 | 18 | 98  | 57  | 36 | 8  | 19 | 100  | 0.5  |
| M14 × 2.0-6g  | 1.2   | M14 | 33 | 37  | 45  | 14 | 21 | 98  | 57  | 36 | 10 | 22 | 120  | 0.5  |
| M16 × 2.0-6g  | 1.5   | M16 | 33 | 37  | 46  | 14 | 24 | 98  | 57  | 36 | 10 | 24 | 150  | 0.5  |
| M18 × 2.5-6g  | 2     | M18 | 50 | 54  | 57  | 17 | 26 | 140 | 82  | 44 | 12 | 30 | 200  | 1.3  |
| M20 × 2.5-6g  | 2.5   | M20 | 50 | 54  | 57  | 17 | 30 | 140 | 82  | 44 | 12 | 30 | 250  | 1.3  |
| M24 × 3.0-6g  | 4     | M24 | 50 | 54  | 59  | 17 | 36 | 140 | 82  | 44 | 14 | 36 | 400  | 1.4  |
| M27 × 3.0-6g  | 4     | M27 | 60 | 65  | 79  | 23 | 38 | 170 | 99  | 62 | 17 | 41 | 400  | 2.8  |
| M30 × 3.5-6g  | 5     | M30 | 60 | 65  | 81  | 23 | 48 | 170 | 99  | 62 | 17 | 46 | 500  | 3.1  |
| M36 × 4.0-6g  | 7     | M36 | 60 | 65  | 88  | 23 | 54 | 178 | 99  | 65 | 22 | 55 | 700  | 3.3  |
| M36 × 4.0-6g  | 8     | M36 | 77 | 85  | 101 | 27 | 62 | 225 | 124 | 78 | 22 | 55 | 800  | 5.8  |
| M42 × 4.5-6g  | 10    | M42 | 77 | 85  | 104 | 27 | 72 | 225 | 124 | 78 | 24 | 65 | 1000 | 6.3  |
| M42 × 4.5-6g  | 15    | M42 | 95 | 104 | 112 | 36 | 63 | 256 | 158 | 86 | 24 | 65 | 1500 | 10.8 |
| M48 × 5.0-6g  | 20    | M48 | 95 | 104 | 120 | 36 | 72 | 259 | 158 | 90 | 27 | 75 | 2000 | 11.6 |

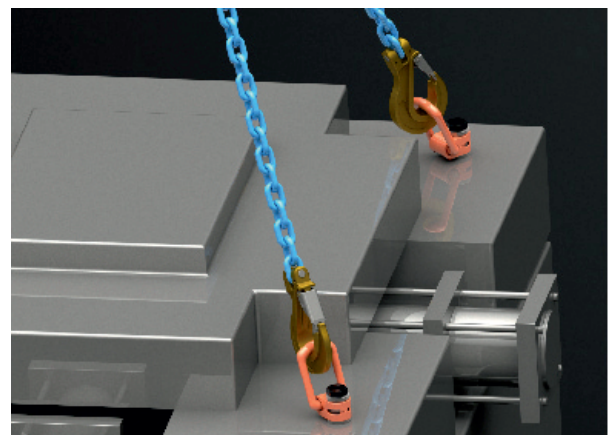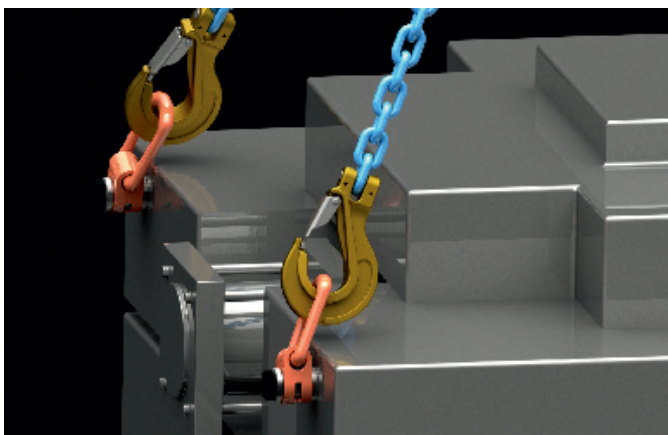






**WARNING**

DO NOT EXCEED WORKING LOAD LIMIT.

USE ONLY G80 &amp; G100 COMPATIBLE COMPONENTS FOR OVERHEAD LIFTING.



## SLRP- 307 SWIVEL ROTATING LIFTING RING

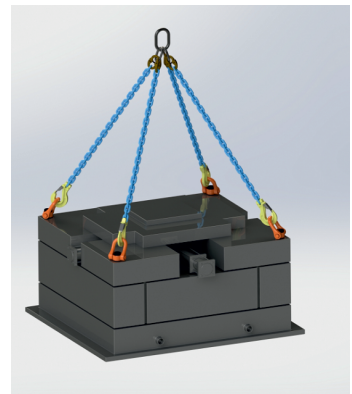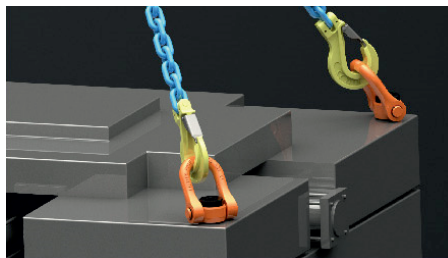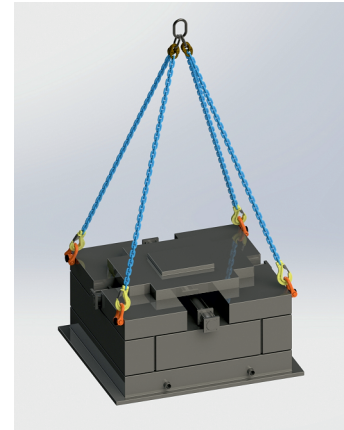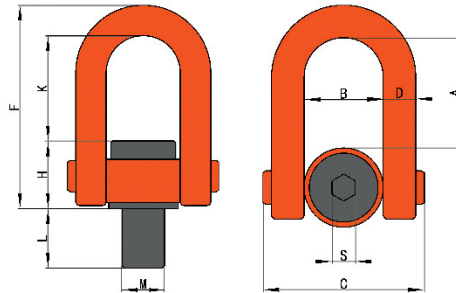**ROTO  
POINTS**


| SIZE          | WLL/T | mm |     |    |     |    |     |     |    |    |      | Nm   | Weight/KG |
|---------------|-------|----|-----|----|-----|----|-----|-----|----|----|------|------|-----------|
|               |       | L  | A   | B  | C   | D  | F   | K   | M  | H  | S    |      |           |
| M8 × 1.25-6g  | 0.5T  | 12 | 49  | 37 | 76  | 14 | 106 | 50  | 8  | 40 | 10.5 | 30   | 0.75      |
| M10 × 1.5-6g  | 0.7T  | 16 | 49  | 37 | 76  | 14 | 106 | 50  | 10 | 40 | 10.5 | 60   | 0.75      |
| M12 × 1.75-6g | 1T    | 18 | 49  | 37 | 76  | 14 | 106 | 50  | 12 | 40 | 10.5 | 100  | 0.76      |
| M14 × 2.0-6g  | 1.5T  | 21 | 49  | 37 | 76  | 14 | 106 | 50  | 14 | 40 | 10.5 | 120  | 0.76      |
| M16 × 2.0-6g  | 2T    | 24 | 49  | 37 | 76  | 14 | 106 | 50  | 16 | 40 | 10.5 | 150  | 0.77      |
| M20 × 2.5-6g  | 3T    | 40 | 73  | 54 | 107 | 20 | 150 | 77  | 20 | 53 | 14.5 | 250  | 2         |
| M24 × 3.0-6g  | 4.5T  | 40 | 73  | 54 | 107 | 20 | 150 | 77  | 24 | 53 | 14.5 | 400  | 2.1       |
| M30 × 3.5-6g  | 7.3T  | 45 | 100 | 74 | 150 | 30 | 200 | 104 | 30 | 69 | 22.5 | 500  | 5.4       |
| M33 × 3.5-6g  | 8T    | 50 | 100 | 74 | 150 | 30 | 200 | 104 | 33 | 69 | 22.5 | 800  | 5.4       |
| M36 × 4.0-6g  | 10T   | 54 | 100 | 74 | 150 | 30 | 200 | 104 | 36 | 69 | 22.5 | 1000 | 5.5       |
| M39 × 4.0-6g  | 10T   | 58 | 100 | 74 | 150 | 30 | 200 | 104 | 39 | 69 | 22.5 | 1200 | 5.6       |
| M42 × 4.5-6g  | 12.5T | 63 | 100 | 74 | 150 | 30 | 200 | 104 | 42 | 69 | 22.5 | 1500 | 5.8       |
| M45 × 4.5-6g  | 15T   | 63 | 100 | 74 | 150 | 30 | 200 | 104 | 45 | 69 | 22.5 | 1800 | 5.8       |
| M48 × 5.0-6g  | 20T   | 68 | 120 | 93 | 182 | 40 | 250 | 120 | 48 | 90 | 27.5 | 2000 | 11.5      |
| M52 × 5.0-6g  | 20T   | 68 | 120 | 93 | 182 | 40 | 250 | 120 | 52 | 90 | 27.5 | 2000 | 12        |
| M56 × 5.5-6g  | 25T   | 78 | 120 | 93 | 182 | 40 | 250 | 120 | 56 | 90 | 27.5 | 2100 | 12        |
| M64 × 6.0-6g  | 32T   | 90 | 120 | 93 | 182 | 40 | 250 | 120 | 64 | 90 | 27.5 | 2200 | 12.8      |