



## Hand Operated Crab Winch

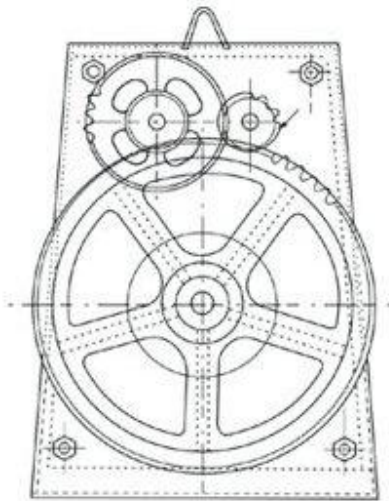

Side View Cross Section

**Hand operated,  
Double Purchase Crab Winch**

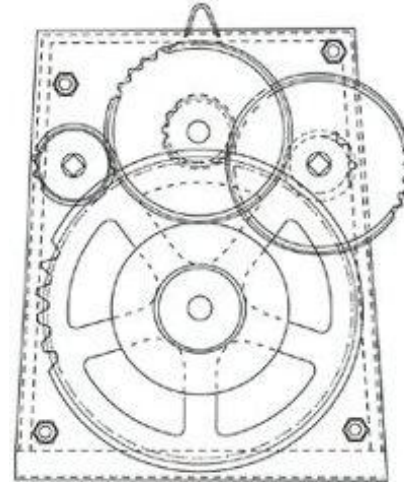

Side View Cross Section

**Hand operated,  
Treble Purchase Crab Winch**

Hand operated Crab winch with square type side plate to cover big pinion and reinforced by side angle, fabricated seamless pipe drum, brake with shoe, ratchet, pawl and handles

To Lift Direct From Barrel	Drum Dia	Drum Length	Thickness of Side Plate	Main Shaft Dia	No. of Driving Shaft	Dia of Driving Shaft	Dia of Tie Rod	No. of Tie Rod	Height	Width	Purchase	Dia Main Pinion	Flange Dia	Weight of Winch
1 Ton	5 1/2"	16"	6mm	32mm	2	1 1/8"	16mm	4	25"	21"	Double	17 1/4"	9"	150
1.5 Ton	5 1/2"	18 1/2"	6mm	32mm	2	1 1/4"	16mm	4	29"	23"	Double	21 1/4"	9"	175
2 Ton	6 5/8"	22"	8mm	40mm	2	1 3/8"	20mm	4	35"	27"	Double	26 1/4"	11"	250
3 Ton	6 5/8"	24"	8mm	45mm	2	1 1/2"	22mm	4	39"	30"	Double	30"	11"	280
5 Ton	8 5/8"	30"	10mm	50mm	2	1 3/4"	25mm	4	48"	34"	Double	35 5/8"	13"	425
7.5 Ton	8 5/8"	30"	10mm	50mm	3	1 3/4"	25mm	4	48"	34"	TRIPLE	35 5/8"	13"	650
10 Ton	8 5/8"	34"	11mm	65mm	3	1.875"	32mm	4	48"	35"	TRIPLE	34"	16"	750

Specifications given are indicative and are subject to change.