


## Shank Safety Hook BKT


Art. no.	Code	WLL tonnes*	L	B	L1	D	dmin	G	H	Weight kgs
Z101112	BKT-6-10	1.5	90	29	36	20	11	15	21	0.5
Z101102	BKT-7/8-10	2.5	111	37	47	24	13	17	26	0.9
Z101069	BKT-10-10	4	133	45	51	29	16	21	31	1.6

d min = the smallest permitted shank dimension after machining.  
Note! After machining of the shank, proof loading must be carried out.

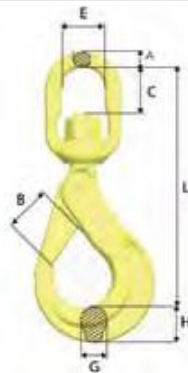


## Swivel Safety Hook BKL

Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z101114	BKL-6-10	1.5	149	29	23	33	11	15	21	0.7
Z101104	BKL-7/8-10	2.5	183	37	27	38	12	17	26	1.2
Z101028	BKL-10-10	4	218	45	37	44	15	21	31	2.0
Z101036	BKL-13-10	6.7	282	55	49	48	19	30	40	4.0
Z101044	BKL-16-10	10	341	62	65	61	25	37	50	7.2
Z101093	BKL-18/20-10	16	368	68	70	72	31	44	62	11.4

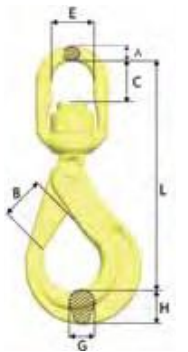


## Swivel Safety Hook BCLK with ball-bearing

Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z101116	BCLK-6-10	1.5	149	29	24	33	11	15	21	0.7
Z101106	BCLK-7/8-10	2.5	183	37	27	38	12	17	26	1.2
Z101030	BCLK-10-10	4	218	45	35	44	15	21	31	2.0
Z101038	BCLK-13-10	6.7	280	55	45	48	19	30	40	4.0
Z101046	BCLK-16-10	10	339	62	63	61	25	37	50	7.4
Z101095	BCLK-18/20-10	16	368	68	59	72	31	44	62	11.5
Z101294	BCLK-22-10 OS	20	436	79	80	80	35	50	62	16.8
Z101295	BCLK-26-10	27	486	100	110	102	45	54	68	26

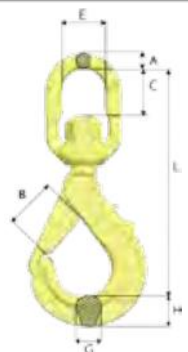

## Swivel Safety Hook with Griplatch LBK

Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z100978	LBK-7/8-10	2.5	177	37	27	38	12	20	22	1.1
Z100960	LBK-10-10	4	214	47	37	44	15	22	29	2.0
Z100993	LBK-13-10	6.7	262	53	45	48	19	29	38	3.8
Z100995	LBK-16-10	10	324	68	66	61	25	30	45	7.1

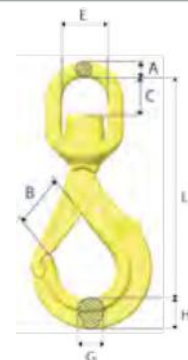

## Swivel Safety Hook with Griplatch LKBK with ball-bearing

Art. no.	Code	WLL tonnes*	L	B	C	E	A	G	H	Weight kgs
Z100980	LKBK-7/8-10	2.5	176	37	27	38	12	20	22	1.2
Z100962	LKBK-10-10	4	213	47	35	44	15	22	29	2.1
Z100997	LKBK-13-10	6.7	261	53	43	48	19	29	38	4.0
Z100999	LKBK-16-10	10	323	68	61	61	25	30	45	6.8